

# EXPOSED FASTENER PANELS

## GNMC 1/2" Corrugated

### Panel Information:

Available Gauges:	29 GA
Substrate:	AZ50 Galvalume
Available Materials:	Painted, Galvalume, Bare Galvanized
Paint Systems:	MS Colorfast 45
Warranties:	Paint 45 Year/Substrate 25 Year
Minimum Slope:	3/12
Panel Width/Coverage:	26"/24"
Panel Ribs:	2.5" On Center, 1/2" Tall

### Panel Testing:

Hail Rating:	Class 4 Impact UL 2218
Fire Rating:	UL 790 Class A

### Fastener Guide:


- #10 Woodfast screws are designed for use with dimensional lumber
- #14 Woodfast screws are designed for use with plywood sheathing, OSB and wafer wood (7/16" minimum thickness)
- #12 Tek screws are designed to be used with structural steel up to 3/16" thick

### Roof Application:

Screws are to be installed following the below details: installed no more 2' up the panel. Pre-drilling is recommended to ensure water tightness. It is recommended to use bead mastic between every panel at the side lap with #12x3/4 Stitch screws installed every 2' up the panel.

### Wall Application:

Screws are to be installed no more than 2' up the panel. Pre-drilling is recommended to ensure water tightness.


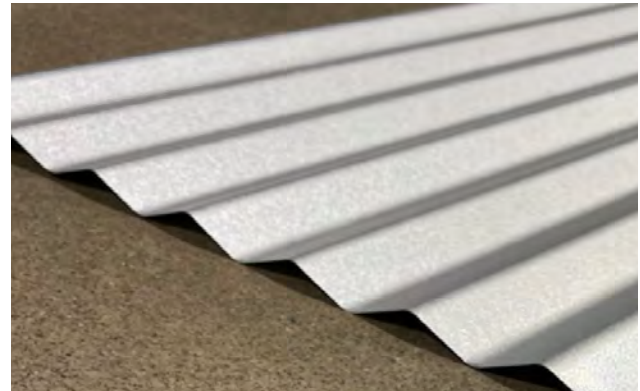


### Light Gauge Panels

Color chart options



### 29G AND 26G COLORS

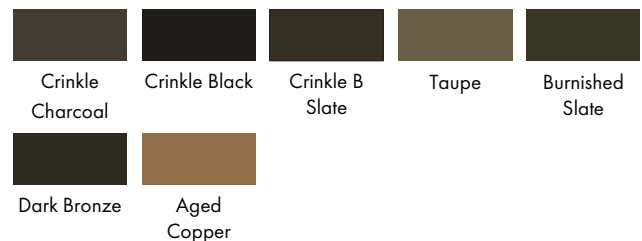

**GREAT NORTHERN  
METAL COMPANY**

(406) 624-0435  
242 DURSTON ROAD SUITE B  
BOZEMAN, MT 59718  
[gnmcusa.com](http://gnmcusa.com)