

EXPOSED FASTENER PANELS

GNMC 3' Rugged Rib

Panel Information:

Available Gauges:	29 GA, 26 GA
Substrate:	AZ 50 Galvalume on Painted material
Available Materials:	Painted, Galvalume
Paint Systems:	Silicon Modified Polyester
Warranties:	40 Year
Minimum Slope:	3/12
Panel Width/Coverage:	38"/36"
Panel Ribs:	12" On Center, 3/4" Tall

Panel Testing:

No Testing at This Time

Fastener Guide:


- #10 Woodfast screws are designed for use with dimensional lumber
- #14 Woodfast screws are designed for use with plywood sheathing, OSB and wafer wood (7/16" minimum thickness)
- #12 Tek screws are designed to be used with structural steel up to 3/16" thick
- #12-14x3/4 Stitch is designed for fastening at the side lap

Roof Application:

Screws are to be installed following the below details: installed following purlin spacing no more than 2'. Predrilling is recommended to ensure water tightness. It is recommended to use bead mastic between every panel at the side lap on roof slopes below a 4/12 with #12x3/4 Stitch screws installed every 2' up the panel.

Wall Application:

Screws are to be installed no more than 2' up the panel. Predrilling is recommended to ensure water tightness.


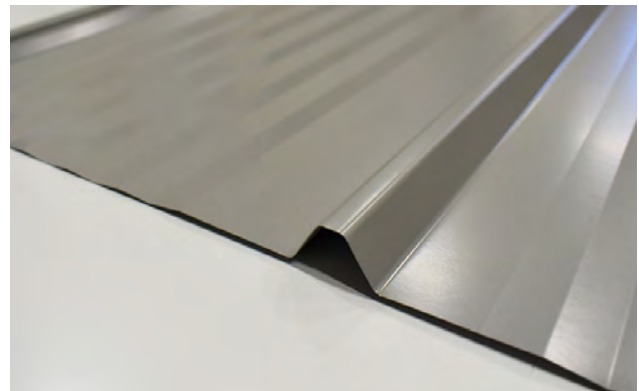


Light Gauge Panels

Color chart options



29G AND 26G COLORS

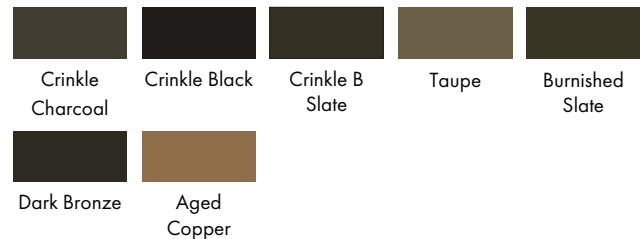

**GREAT NORTHERN
METAL COMPANY**

(406) 624-0435
242 DURSTON ROAD SUITE B
BOZEMAN, MT 59718
gnmcusa.com