

EXPOSED FASTENER PANELS

GNMC Lo Pro Panel

Panel Information:

Available Gauges:	29 GA, 26 GA
Substrate:	AZ 50 Galvalume on Painted material
Available Materials:	Painted, Galvalume
Paint Systems:	Silicon Modified Polyester
Warranties:	40 Year
Minimum Slope:	Not Recommended for Roofing
Panel Width/Coverage:	38"/36"

Panel Testing:

No Testing at this time

Fastener Guide:


- #10 Woodfast screws are designed for use with dimensional lumber
- #14 Woodfast screws are designed for use with plywood sheathing, OSB and wafer wood (7/16" minimum thickness)
- #12 Tek screws are designed to be used with structural steel up to 3/16" thick

Roof Application:

Not recommended for roofing applications

Wall Application:

Screws are to be installed no more than 2' up the panel. Predrilling is recommended to ensure water tightness. Must be installed over solid substrate.


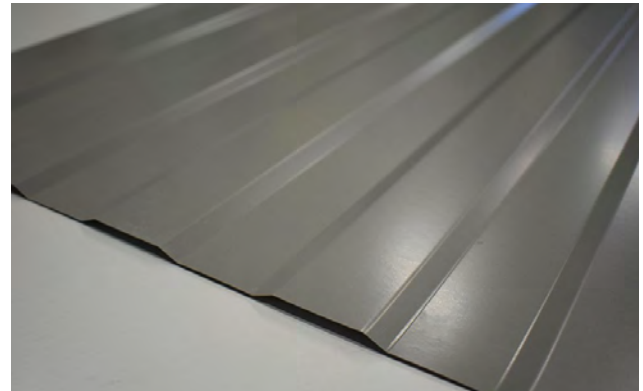


Light Gauge Panels

Color chart options



29G AND 26G COLORS

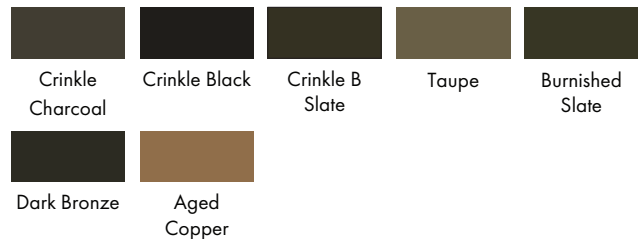

**GREAT NORTHERN
METAL COMPANY**

(406) 624-0435
242 DURSTON ROAD SUITE B
BOZEMAN, MT 59718
gnmcusa.com