



SC3 PROFILE CLOSURE™

WEATHER RESISTANT BARRIER!

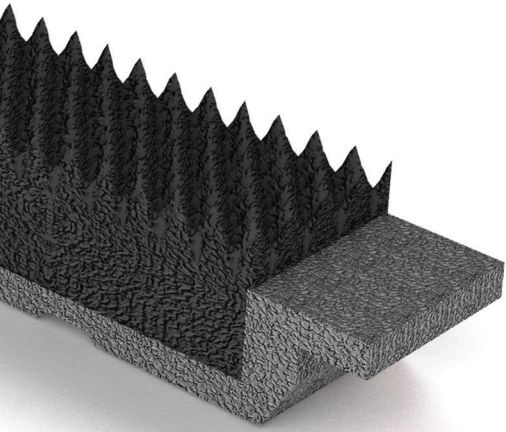

The unique design of **SC3 PROFILE CLOSURE™** by Lakeside Construction Fasteners creates a weather-tight seal to the metal panel allowing for free air movement. In cold weather environments the **SC3 PROFILE CLOSURE™** will expel moisture and in hot weather move solar-heated hot air from the attic throughout the building ridge. **SC3 PROFILE CLOSURE™** with new memory flex foam technologies and patented UV Hydrophobic Coating prevents water, dirt, snow, and insects from penetrating the building structure throughout the ridge cap after installation! The premium **SC3 PROFILE CLOSURE™** System is the Complete Ridge Venting Solution providing installers and contractors a Weather Resistant Barrier for Non Planar Profiles!

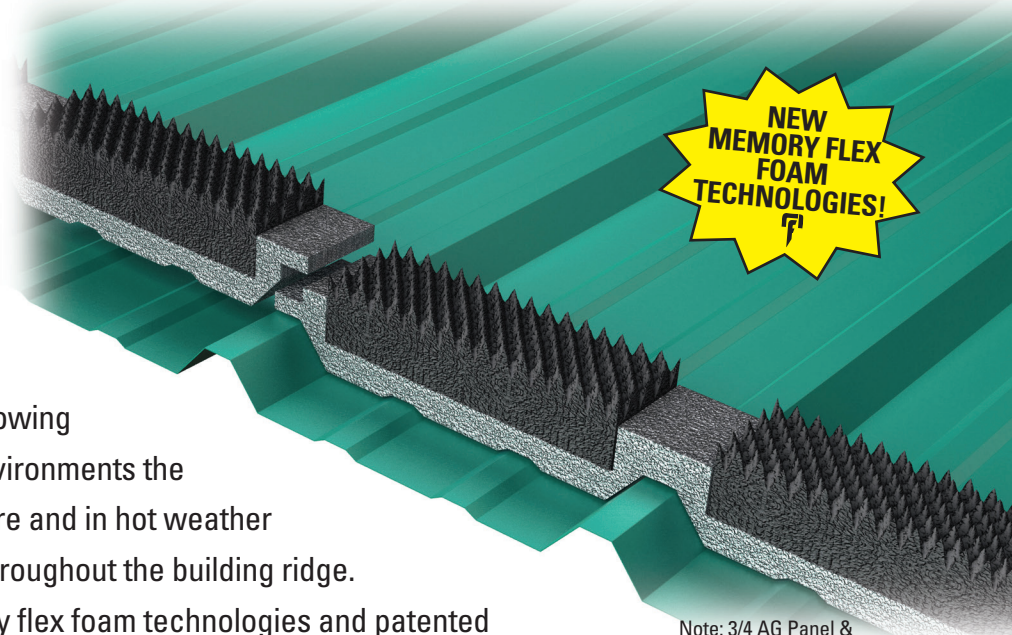

**NEW
MEMORY FLEX
FOAM
TECHNOLOGIES!**

Note: 3/4 AG Panel & other profiles available.

SC3 PROFILE CLOSURE™ SYSTEM:

- Contour Cut for Exact Panel Match!
- Provides a Weather-Tight Seal!
- Double Bead Adhesive for Secure Installation!
- Ideal for Non Planar Profiles!
- 40 Year Limited Warranty!



Made in the U.S.A.

LAKESIDE
CONSTRUCTION FASTENERS

FOLLOW US ON



To purchase contact us at:
1203 Goldsmith Road, Paragould, AR 72450
870-586-0703 (office) | 870-586-0643 (fax)
800-537-4160 (toll free)
www.lakeside-fasteners.com


2-2023_V24

“Providing a Weather-Tight Barrier”


- Description:** 3/4" AG; A-Panel; R-Panel; PBR; 5/8" Rib
Available in other panel profiles upon request.
- Size:** 3' Closure length (Ag / Residential)
- Innovation:** Patented UV Coating; 2 Adhesive Beads Full Length of Product, Antimicrobial
- Material:** Open Cell; Promotes Free Air Flow
Close Cell; Promotes Weather Tight Barrier
- Stock:** Sold by Carton, Pallet or Truckload

SC3 PROFILE CLOSURE


WEATHER RESISTANT BARRIER!

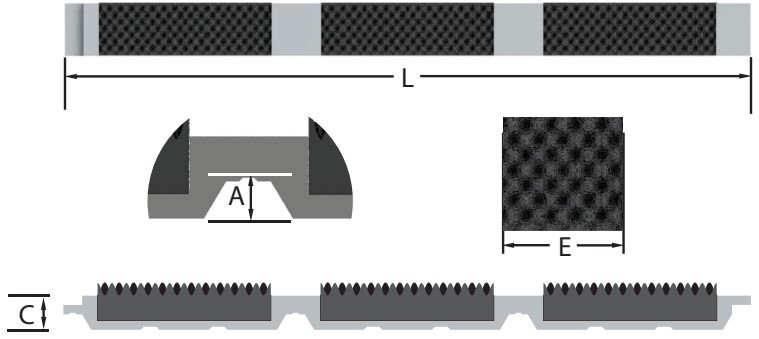

Part #	L	C	A	E
34HRSC3PC	3'	2"	3/4"	2"

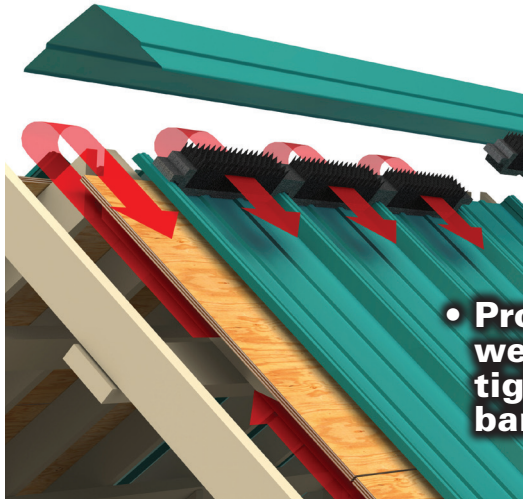

• Provides weather tight barrier!

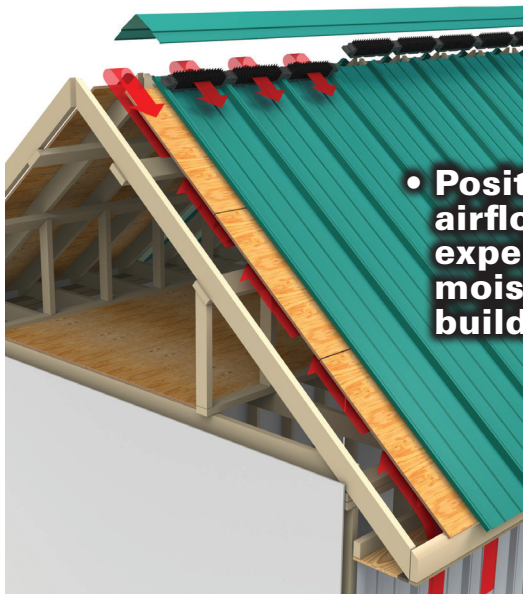

• Positive airflow to expel moisture build-up!

Specifications

- Air Permeability 760 Cubic Feet per minute
- Heat Resistance 325°F (163°C) for 550 hours
(Foam Blocks)
- Cold Crack -130°F (-55°C)
- Snow Infiltration 0
- Dust Infiltration 0
- Tensile Strength 64 PSI; Elongation 145%
- Attic Ventilation Meets UBC Code
- Net Free Area 20 sq. inches per Linear Foot at the ridge
- Rain No Leaks



Made in the U.S.A.



To purchase contact us at:
1203 Goldsmith Road, Paragould, AR 72450
870-586-0703 (office) | 870-586-0643 (fax)
800-537-4160 (toll free)
www.lakeside-fasteners.com